



## How to create a CMS IntelliCAD PE Plus\* USB Dongle – Steps Sequence

(\* Starting from 10.1 version)

- 1) Download the **USB Dongle Maker tool** from your **Store Profile > Downloads** tab
- 2) Insert an empty **USB Flash Drive** into a USB port of the system
- 3) Run the **USB Dongle Maker tool** as system administrator and insert the license **Activation Key** found at the **LICENSES** webpage of <https://intellcadms.com>
  - 3.1) Click on **“Connect”** button
  - 3.2) Click on **“Make Key”** button
  - 3.3) select the **USB Flash Drive** by picking the right check box
- 3.4) Click on the **“Make”** button and the USB Flash Drive will be converted as USB Dongle for CMS IntelliCAD software
- 3.5) Run CMS IntelliCAD and no license registration will be required

### How to enable write protection on a USB Flash Drive

Press **Windows key + R** to open the Run box. Type **diskpart** and press **Enter**. Click **“YES”** for full UAC control.  
At the **DISKPART>** prompt, type **list disk** and press **Enter**.  
Select your USB flash drive with the **select disk** command, e.g., **select disk 1**.  
To set the **read-only attribute** (making the flash drive write-protected), use the command: **attributes disk set readonly**

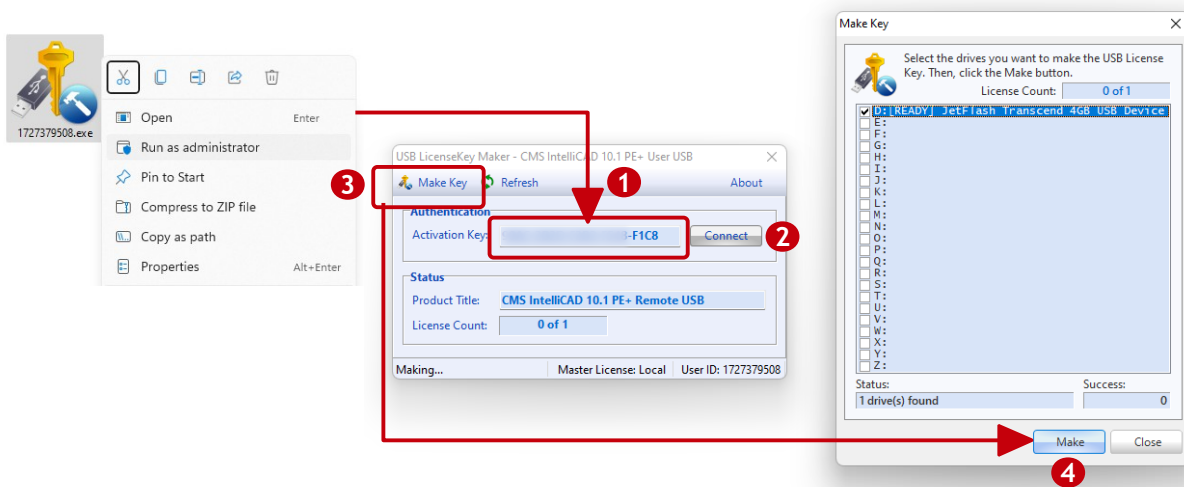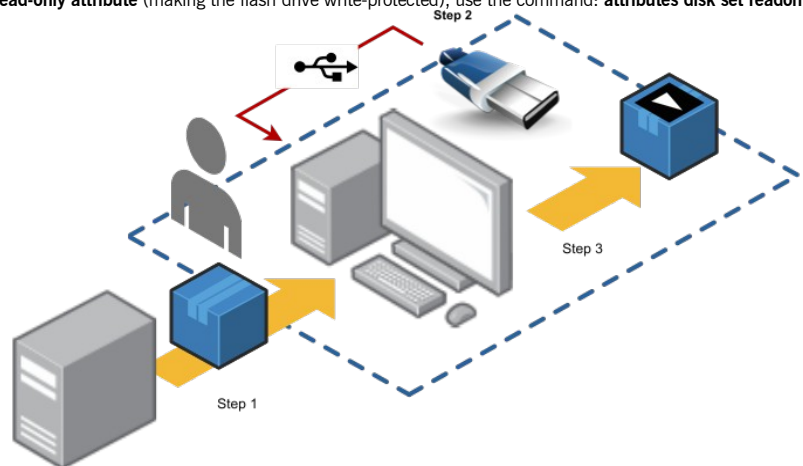

### CAD-MANUFACTURING SOLUTIONS, INC.

PO Box 1261  
Azle - Texas  
TX 76098 - USA  
Phone: +1 (501) 588-7970 (Sales support ONLY)  
Web: <https://intellcadms.com> Email: [registrar@etoolbox.com](mailto:registrar@etoolbox.com)

©1993-2022. CAD-MANUFACTURING SOLUTIONS, INC.  
IntelliCAD and the IntelliCAD logo are registered trademarks of the IntelliCAD Technology Consortium in the United States and other countries. All other trademarks are property of their respective owners.